

# DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION

# NOTICE OF ACCEPTANCE (NOA)

MIAMI-DADE COUNTY PRODUCT CONTROL SECTION 11805 SW 26 Street, Room 208 Miami, Florida 33175-2474 T (786) 315-2590 F (786) 315-2599

www.miamidade.gov/economy

Georgia Pacific Corporation 4300 Wildwood Parkway, Suite 300 Atlanta, GA 30339

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER-Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

## **DESCRIPTION:** Georgia Pacific Vinyl Siding and Soffit

**APPROVAL DOCUMENT:** Drawing No. 12-0829.13, titled "Installation Design Drawing for Vinyl Siding/Soffit", sheets 1 and 2 of 2, dated 01/25/2013, prepared by the manufacturer, signed and sealed by Allen N. Reeves, P.E., bearing the Miami-Dade County Product Control revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

## MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

**LABELING:** Each piece shall bear a permanent label marked at not more than 4' o.c. with the manufacturer's name or logo, city, state, and following statement: "Miami-Dade County Product Control Approved" and per FBC 1715.9.2 and 1715.9.3 on Soffits.

**RENEWAL** of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

**TERMINATION** of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

**ADVERTISEMENT:** The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

**INSPECTION:** A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises and renews NOA # 07-1002.06 and consists of this page 1 and evidence page E-1, as well as approval document mentioned above.

The submitted documentation was reviewed by Carlos M. Utrera, P.E.

(MIAMIDADE COUNTY)
APPROVED

104/22/2013

NOA No. 12-0829.13 Expiration Date: October 31, 2017 Approval Date: May 2, 2013 Page 1

### NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

#### A. DRAWINGS

1. Drawing No. 12-0829.13, titled "Installation Design Drawing for Vinyl Siding/Soffit", sheets 1 and 2 of 2, dated 01/25/2013, prepared by the manufacturer, signed and sealed by Allen N. Reeves, P.E.

#### B. TESTS "Submitted under NOA # 03-1017.01"

	Laboratory Report	Test	Date	Signature
1.	01-44749.02	TAS 202 & 203	03/10/04	J. A. Reed, P.E.
2.	01-44739.02	TAS 202 & 203	03/10/04	J. A. Reed, P.E.
3.	01-44750.02	TAS 202 & 203	03/10/04	J. A. Reed, P.E.
4.	50437.01-106-18	ASTM G155	12/06/04	J. A. Reed, P.E.
5.	50437.01-106-18	ASTM D638	12/06/04	J. A. Reed, P.E.

#### C. CALCULATIONS

1. None.

#### D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

#### E. MATERIAL CERTIFICATIONS

1. None.

#### F. STATEMENTS

1. Statement letter of code conformance to 2010 FBC issued by H.R. Engineering, Inc., dated 01/30/2013, signed and sealed by Allen N. Reeves, P.E.

#### "Submitted under NOA # 08-0429.11"

- 2. Statement letter of no financial interest issued by H.R. Engineering, Inc., dated 05/19/2008, signed and sealed by Allen N. Reeves, P.E.
- 3. Private label agreement letter dated 08/14/2002.


Carlos M. Utrera, P.E. Product Control Examiner

NOA No. 12-0829.13

Expiration Date: October 31, 2017

Approval Date: May 2, 2013

APPROVED	CONFIGURATION	EXPOSURE	В	C	NAIL	THICKNESS	DESIGN
MODELS		INCHES			SPACING	001	PRESSURE
,		"A"					(PSF)
Oakside	Double 4"	8	4 •	1/2	8"h x 8"v	0.036"	-46.6
Parkside	Double 4"	8	4	1/2	8"h x 8"v	0.038"	-46.6
Forest Ridge	Double 4"	8	4	1/2	8"h x 8"v	0.042"	-46.6
Cedar Lane	Double 4"	8	4	1/2	8"h x 8"v	0.046"	-46.6
Vision Pro	Double 4"	8	4	1/2	8"h x 8"v	0.040"	-46.6
Heritage Hill	D 4" double hem	8	4	3/4	8"h x 8"v	0.044"	-46.6
Oakside	Double 4" DL	8	4	1/2	8"h x 8"v	0.036"	-46.6
Parkside	Double 4" DL	8	4	1/2	8"h x 8"v	0.038"	-46.6
Cedar Lane	Double 4" DL	8 .	4	1/2	8"h x 8"v	0.046"	-46.6
Vision Pro	Double 4" DL	8	4	1/2	8"h x 8"v	0.040"	-46.6
Park Ridge	Double 4" DL	8	4	1/2	8"h x 8"v	0.036"	-46.6
Shadow	Double 4" DL	8	4	1/2	8"h x 8"v	0.042"	-46.6
Ridge					•		
Oakside	Double 4 1/2" DL	9	4.5	1/2	8"h x 9"v	0.036"	-40.0
Parkside	Double 4 1/2" DL	9	4.5	1/2	8"h x 9"v	0,038"	-40.0
Park Ridge	Double 4 1/2" DL	9	4.5	1/2	8"h x 9"v	0.036"	-40.0
Heritage Hill	D4.5"DL double hem	9 .	4.5	3/4	8"h x 9"v	0.044"	-40.0
Parkside	Double 5"	10	5	1/2	8"h x 10"v	0.038"	-40.0
Forest Ridge	Double 5"	10	5	1/2	8"h x 10"v	0.042"	-40.0
Cedar Lane	Double 5"	10	5	1/2	8"h x 10"v	0.046"	-40.0
Vision Pro	Double 5"	10	5	1/2	8"h x 10"v	0.040"	-40.0
Heritage Hill	D 5" double hem	10	5	3/4	8"hx10"v	0.044"	-40.0
Oakside	Double 5" DL	10	5	1/2	8"h x 10"v	0.036"	-40.0
Parkside	Double 5" DL	10	5	5/8	8"h x 10"v	0.038"	-40.0
Cedar Lane	Double 5" DL	10	5	5/8	8"h x 10"v	0.046"	-40.0
Vision Pro	Double 5" DL	10	5	5/8	8"h x 10"v	0.040"	-40.0
Park Ridge	Double 5" DL	10	5	5/8	8"h x 10"v	0.036"	-40.0
Shadow	Double 5" DL	10	5	5/8	8"h x 10"v	0.042"	-40.0
Ridge				_			
Chatham	Triple 3"	9	3	1/2	8"h x 9"v	0.040"	-40.0
Ridge							
Somerset	Single 6 1/2"	6 1/2	6.5	1/2	8"h x6.5"v	0.044"	-60.0
Beaded					·		
Castle Ridge	Single 8"	8	8	3/4	8"h x 8"v	0.044"	-46.6
Board &	Single 7"	7	7	3/4	7"h x 7"v	0.048"	-46.6
Batten							
Parkside	Triple 3 1/3"	10	5	1/2	8"h x 10"v	0.038"	-40.0

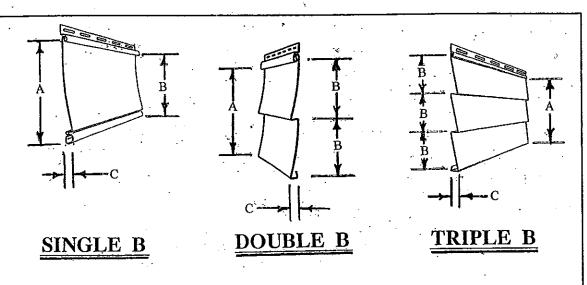

2 X 3 WOOD FURRING STRIPS No. 2 MIXED SOUTHERN PINE OR BETTER, PLACED VERTICALLY. SPACINGTO MATCH HORIZONTAL SPACING IN TABLE. FASTEN TO MASONRY BLOCK WITH 3/16" DIA. ITW TAPCONS WITH MINIMUM 1-1/14" EMBEDMENT. TAPCON SPACING 8" MAX, WHEN FURRING IS AT 12" AND TAPCON SPACING 6" MAX. WHEN FURRING IS AT 8". GALVANIZED ROOFING NAIL 1/8" SHANK DIA., 3/8" HEAD DIA. X 1-1/2" LONG. FOR SPACING, SEE TABLE. FOR SPACINGS AT 8". ½ OF NAILS MUST PENETRATE STUDS STUDS @ MAX. SPACING 16" O.C. 5/8" (5) PLY PLYWOOD, ATTACH TO STUDS WITH 1-1/2" ROOFING NAILS AT 3" MAX. SPACING, OR #8 X 1-5/8" WOOD SCREWS AT 12" MAX. SPACING. STUD WALL BLOCK WALL'

# GENERAL NOTES

- 1 GEORGIA PACIFIC VINYL SIDING & SOFFIT PRODUCTS ARE MFG. FROM A FORMULATED PVC COMPOUND MEETING OR EXCEEDING THE REQUIREMENTS OF ASTM D 3679 STD. FOR PVC SIDING AND COMPOUNDS.
- 2 WALLS AND SOFFIT TO RECEIVE VINYL SIDING / SOFFIT SHALL BE CHECKED FOR STRUCTURAL ADEQUACY, CRACKS AND DEFECTS THAT SHALL BE ELIMINATED.
- 3 WALLS SHALL BE WATER PROOFED WITH ASPHALT SATURATED FELT OF NOT LESS THAN 15#/100 SQ. FT. AS DESCRIBED IN SECTION 2121.6.2 OR 1404.2 OF THE FBC.
- 4 WALLS & SOFFIT WHERE THE SIDING /
  SOFFIT ARE TO BE INSTALLED SHALL BE
  DESIGNED BY A REGISTERED ARCHITECT
  OR ENGINEER ACCORDING TO THE FBC
  AND THE MINIMUM REQUIREMENTS OF
  THIS DRAWING.
- 5 INSTALLATION OF THE SIDING / SOFFIT AND ACCESSORY PRODUCTS SHALL BE DONE IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS AND THE APPLICABLE SECTIONS OF THE FBC.

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No (2-03/2).
Expiration Date 10/31/201

STATE OF WILLIAM ON AL ENGINEER MAN PARY 2013

# WALL SECTIONS

Date

SCALE:

# ALLEN N. REEVES, P.E. STRUCTURAL ENGINEER FLORIDA LICENSE NO. 19354

#### GEORGIA PACIFIC

4300 WILDWOOD PKWY, SUITE 300 ATLANTA, GA 30339

# INSTALLATION DESIGN DRAWING FOR VINYL SIDING

DRAWN BY:

Revisions ...

ANR DATE: 25 JAN. 2013

VARIES

PLA File #12-0829.13

SHEET 1 OF 2

32

